

# *Single-phase Portable Pumps*

**LB/HS/NK/LSC/LSP/FAMILY SERIES**





# SINGLE-PHASE PORTABLE DEWATERING PUMPS

Tsurumi single-phase portable dewatering pumps are compact and lightweight, so they are very easy handle and carry. Available in an extensive lineup of motor outputs ranging from 0.1 to 2.2kW, these pumps are suited for a wide range of applications besides general pumping and drainage, including slurries, residues and household uses.

Though compact in size, these pumps pack a host of original technologies that Tsurumi has tested and proven over many years, including the anti-wicking cable, inside mechanical seal with silicon carbide face and Oil Lifter\*, etc. Additionally, key components that are prone to wear are made of durable materials and pumps as a whole are designed for continuous duty. For these reasons, Tsurumi single-phase portable pumps are a popular choice at civil engineering, construction and other work sites that demand high reliability.

\* excluding FAMILY-series

Tsurumi has been manufacturing construction dewatering pumps for more than 50 years. This has led to numerous technologies and know-how for improving the durability and maintainability of pumps in the rental and construction markets where rugged work environments demand heavy-duty specifications. All of Tsurumi's pumps are designed and built to be durable and reliable so as to serve users dependably.

**LB**

-Typical Pumps-



**LSC**

-Residue Drainage Pump-



**HS**

-Multi-field Use Pumps-



**LSP**

-Free-positioning Residue Drainage Pump-



**NK**

-Larger Output Pumps-



**FAMILY**

-Domestic Pumps-



# Structure



**LB**



**HS**



**LSC**

**1 Anti-Wicking Cable Entry**

Prevents water incursion due to capillary action should the cable sheath be damaged or the end of cable submerged. Also prevents moist air from infiltrating the motor housing and condensation from forming inside the housing due to temperature differences between the housing and outside air.

**2 Motor Protector**

**Miniature Thermal Protector (0.48kW and below)**

Detects excess heat, therefore, protecting the pump against overheating and dry-running.

**Circle Thermal Protector (0.55kW and above)**

Directly cuts the motor circuit if excessive heat builds up or overcurrent occurs in the motor.

**3 Dual Inside Mechanical Seals with Silicon Carbide Face**

**Inside Mechanical Seal with Silicon Carbide Face (FAMILY)**

Isolated in the oil chamber where a clean, non-corrosive and abrasion-free lubricating environment is maintained. Compared with the water-cooled outside mechanical seal, it reduces the risk of failure caused by dry-heating and adhering matter. The silicon carbide provides 5 times higher corrosion, wear and heat resistance than the tungsten carbide.

**4 Oil Lifter**

\* Not available for FAMILY

Provides lubrication and cooling of the seal faces down to 1/3 of normal oil level, thus maintaining a stable shaft sealing effect and prolonging seal life longer. The Oil Lifter is Tsurumi original design.

**5 V-Ring / Oil Seal (excluding HS(Z/R)2.4S, FAMILY)**

Used as a "Dust Seal", they protect the mechanical seal from abrasive particles.

**6 Multi-Directional Hose Coupling (LB / LB-A / HSR / LSC)**

Can be configured for inclined or vertical discharge, allowing for smoother installation.

**7 Cable Clip (excluding NK3-22L, LSP, FAMILY)**

Prevents unexpected water incursion that can occur if the cable is damaged, by protecting the cable against the tugging and rough handling found at construction sites.

**8 Agitator**

**For HS and HSZ**

Prevents the air lock that tends to take place on vortex or semi-vortex pumps.

**For HSD**

Assists the pump in sucking and transferring bentonite slurry, slime, mud, and water with high sand content.

**9 Resin-made Stand (HS / HSZ / HSD)**

**Rubber Stand (HSR / LSC / LSP)**

Prevents scratching of floor surface.

**10 Reverse-flow Prevention Mechanism (LSC)**

A valve seat and swing check valve prevent suctioned water from backflowing.

# Feature

## Selection Table


		Submersible						Non Submersible	Submersible	
		Drainage		Slurry	Residue		Drainage	Residue		Domestic
		LB	HS	HSD	HSR	NK	LSC	LSP	FAMILY	
Discharge Bore	mm	50(80)	50 · 80	50	50	50 · 80	25 · 50	25	15, 25	
Motor Output	kW	0.48 - 1.5	0.4 · 0.75	0.55	0.4	1.5 · 2.2	0.48 · 0.75	0.48	0.1	
Discharge Design	Top Discharge	Flow-Thru	●				●	●	●	
		Side Flow				●				
	Side Discharge		●	●	●					
Automatic Operation		LB-A (Electrodes)	HSZ (Float)	—	—	—	—	—	FAMILY-A (Cylindrical Float)	
Page No.		7 - 8	9 - 10		11 - 12	13	14	15 - 16		

## Motor Cooling & Discharge Design

### Top Discharge, Flow-Thru Design

This design provides maximum motor cooling efficiency allowing continuous operation at low water levels and extended dry-run capability, and also allows the shape of the pump to be cylindrical and slim for installation in a well casing for deep well dewatering.


LB LB-A LSC LSP FAMILY FAMILY-A



### Top Discharge, Side Flow Design

This design assures efficient motor cooling even if the pump runs with its motor exposed to air, and also allows the overall diameter of the pump to be reduced for installation in confined spaces.


NK



### Side Discharge, Spiral Design

The pump has a spiral pump casing that facilitates smoother passage of solid matters like mud and soil contained in the pumped liquid. It is a simple and practical design that facilitates inspection and repair work.

HS HSZ HSD HSR



## Automatic Operation

The automatic model only operates when sufficient water is present. It not only reduces power consumption but also extends the life of wear parts of the pump as it eliminates dry-running that causes early wear-out.

### Electrodes (LB-A)

Tsurumi has developed a unique automatic control device utilizing electrodes. The pump stops automatically in about one minute after the water surface falls below the electric probe.

Since this mechanism eliminates dry-running, the pump can reduce power consumption by up to 40 percent compared with non-automatic pumps (Tsurumi comparison). It also prevents chattering caused by a turbulent water surface and extends operating life.



### Float Switch (HSZ / FAMILY-A)

This automatic operation system is controlled by a float switch. When the water level rises and raises the float switch to a preset level, the switch turns on, and the pump starts. When the water level lowers to the preset level, pump operation stops.

## Residue Drainage

**HSR** Can pump water as shallow as 5mm from the bottom of the pump and drain water to 1mm in depth.



**LSC** Can drain water to 1mm in depth. A valve seat and swing check valve prevent suctioned water from backflowing.



**LSP** Can pump pooled water from shallow recesses using the suction attachment. A syphon breaker mechanism prevents backflowing and the seal water from draining out.



**FAMILY option** Attaching the optional residue adapter to the pump casing allows draining to 1mm in depth.

\* excluding automatic model



# LB -Typical Pumps-

The LB/LB-A series are submersible single-phase portable drainage pumps. The discharge direction is selectable between vertical and inclined, which prevents folding or bending of the discharge hose.\* Every LB-series is slim design enough to be accommodated in an 8-inch pipe. The LB-A series with an innovative electrode type relay unit automatically starts and stops the pump to eliminate dry-running. This mechanism greatly reduces power consumption and extends operating life.

\* excluding LB-1500





- Flow-thru Design
  - Anti-wicking Cable Entry
  - Motor Protector
  - Dual Inside Mechanical Seal
  - Oil Lifter
  - V-ring
  - Cable Clip
  - Multi-directional Hose Coupling\*
- \* excluding LB-1500

Model	Discharge Bore (mm)	Motor Output (kW)	Phase	Starting Method	Solids Passage (mm)	Dry Weight (kg)	Cable Length (m)
LB	LB-480	50	Single	Capacitor Run	6	10.4	5
	LB-800	50(80)		Capacitor Run	6	13.1	5
	LB-1500	50(80)		Capacitor Start	6	33	10
LB-A -Automatic-	LB-480A	50	Single	Capacitor Run	6	11	5
	LB-800A	50(80)		Capacitor Run	6	13.7	5


- Male threaded coupling for pipe connection available upon special request
- 80mm discharge bore available upon special request
- Weights excluding cable

## Performance Curves

Standard and Automatic models have the identical performance.

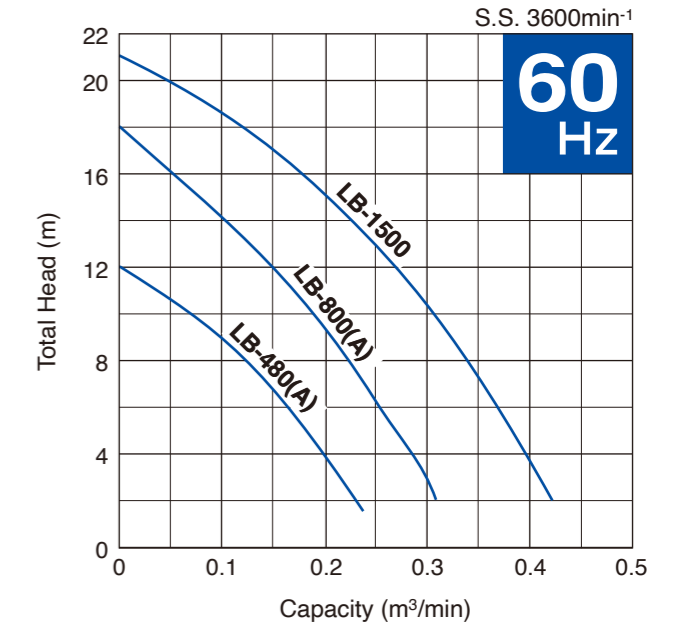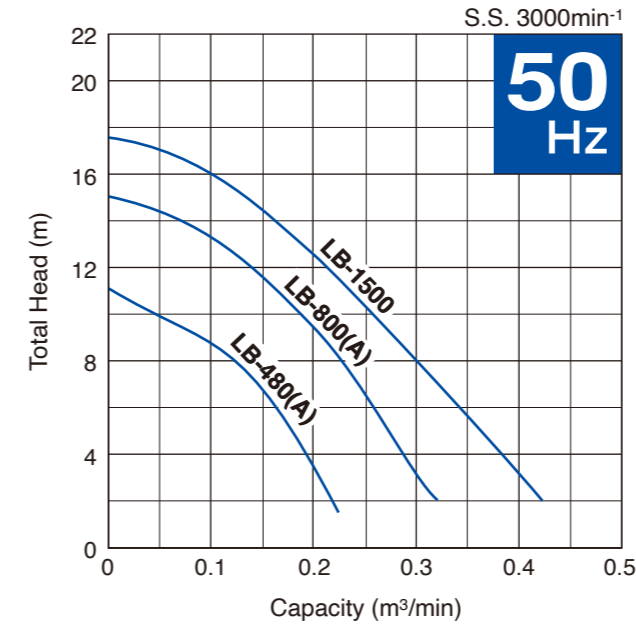


## Dimensions

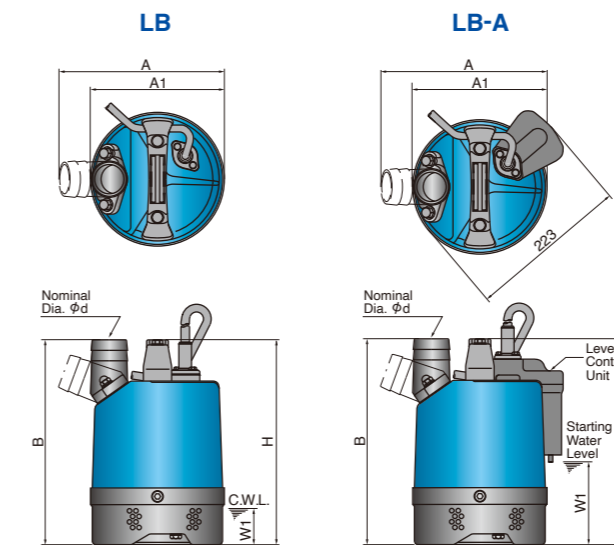


Unit: mm

Model	d	A	A1	B	H	W1
LB-480	50	233	189	—	286	50
LB-800	50(80)	230	186	338	341	50
LB-1500	50(80)	187	—	600	593	80
LB-480A	50	233	189	—	286	115
LB-800A	50(80)	230	186	338	341	170



## Automatic Operation (LB-A)

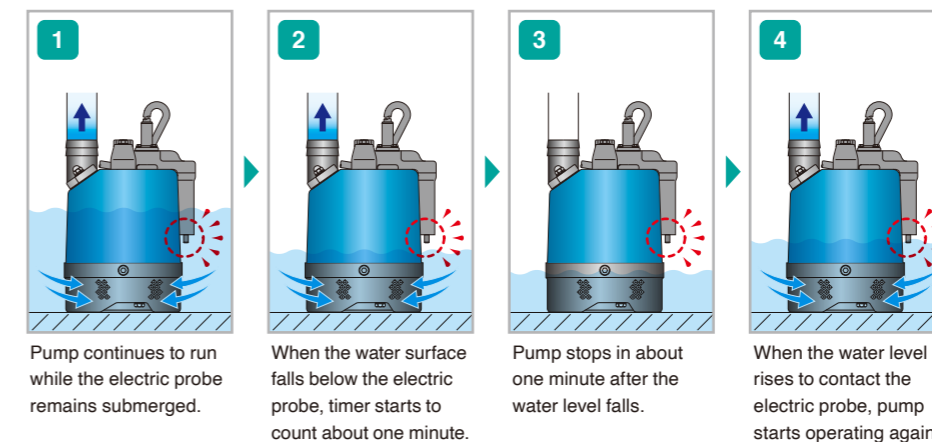

The process is repeated.

**Optional Accessory**

**Extension Probe x 2**

It is possible to set a lower starting water level by using an extension probe (optional accessory). The starting water level is adjustable because the extension probe can be cut to the desired length as it is made of coil spring.

# HS - Multi-field Use Pumps-

The HS/HSZ/HSD/HSR series are submersible single-phase portable pumps. The shaft-mounted agitator prevents the air lock that tends to take place on vortex or semi-vortex pumps.\* The rubber/resin-made stand protects the floor surface from scratching. The HSZ-series with a single float switch reduces power consumption and extends operating life.

The HSD pump is equipped with a high-chromium cast iron agitator that assists smooth suction of the settled matters. The HSR pump can start operating at as low as 5mm of water level and can continue pumping up to 1mm. Additionally, the discharge direction is selectable between vertical and inclined, which prevents folding or bending of the discharge hose.

\* excluding HSR





Model	Discharge Bore mm	Motor Output kW	Phase	Starting Method	Solids Passage mm	Dry Weight kg	Cable Length m
HS	HS2.4S	0.4	Single	Capacitor Run	7	11.3	5
	HS2.75S	0.75		Capacitor Run	7	16.4	5
	HS3.75S	0.75		Capacitor Run	7	16.8	5
	HS3.75SL	0.75		Capacitor Run	7	19.6	5
HSZ -Automatic-	HSZ2.4S	0.4		Capacitor Run	7	11.3	5
	HSZ2.75S	0.75		Capacitor Run	7	16.4	5
	HSZ3.75S	0.75		Capacitor Run	7	16.8	5
	HSZ3.75SL	0.75		Capacitor Run	7	19.6	5
HSD -Slurry-	HSD2.55S	0.55		Capacitor Run	9	14	5
HSR -Residue-	HSR2.4S	0.4		Capacitor Run	3	10.8	5

• Male threaded coupling for pipe connection available upon special request  
• Weights excluding cable


## Performance Curves

Standard and Automatic models have the identical performance.

\* For HSR2.4S, the curve shows the pump performance while operating in a hanging condition without any restriction to the suction.

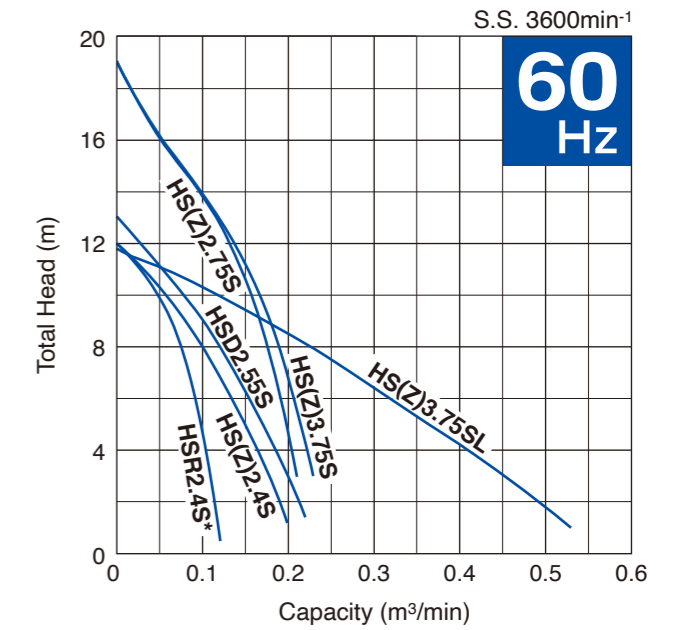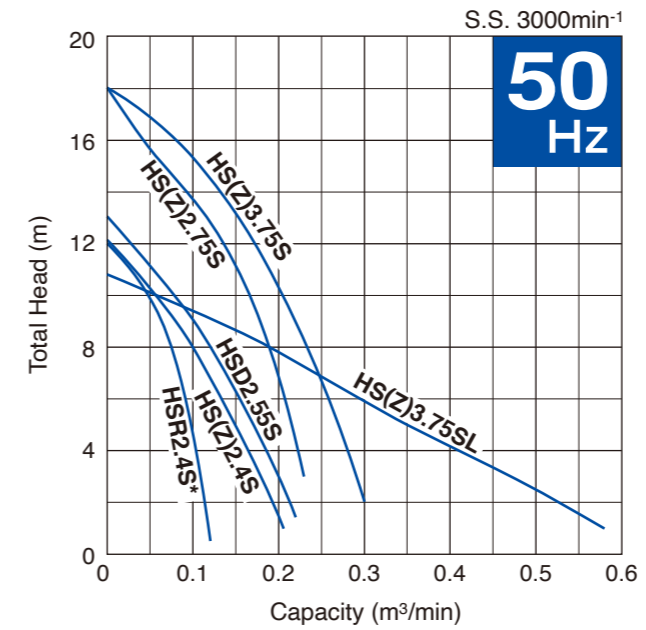


## Dimensions

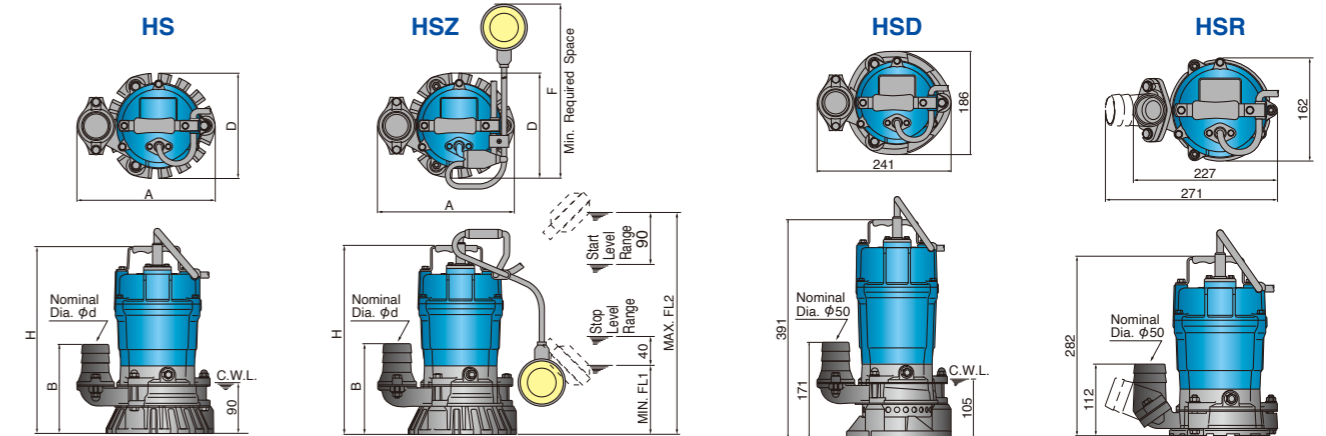

Model	d	A	B	D	H	F	FL1	FL2
HS2.4S	50	241	158	184	328	-	-	-
HS2.75S/HS3.75S	50/80	285	218	184	394	-	-	-
HS3.75SL	80	288	249	184	425	-	-	-
HSZ2.4S	50	241	158	184	328	340	120	385
HSZ2.75S/HSZ3.75S	50/80	285	218	184	394	370	150	475
HSZ3.75SL	80	288	249	184	425	350	150	475

Unit: mm

## Automatic Operation (HSZ)

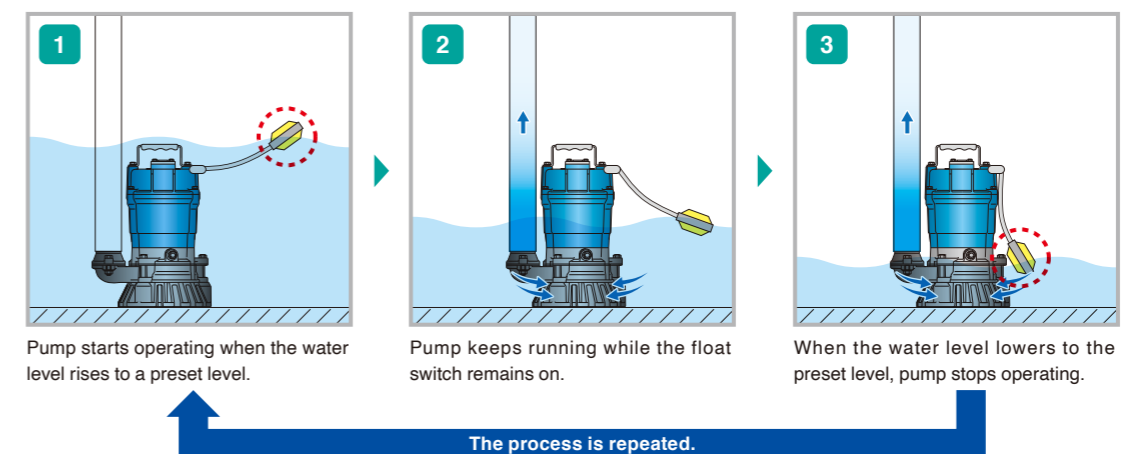

# NK – Larger Output Pumps –

The NK-series is a submersible single-phase portable drainage pump having a larger output motor. Though it is a single-phase unit, the pump has the durability equivalent to three-phase drainage pumps, since the wear parts are made of abrasion-resistant materials. The slim design allows the pump to be placed in a confined space.

NK3-15





- Side Flow Design
- Anti-wicking Cable Entry
- Motor Protector
- Dual Inside Mechanical Seal
- Oil Lifter
- V-ring / Oil Seal
- Cable Clip\*  
\* excluding NK3-22L


Model	Discharge Bore mm	Motor Output kW	Phase	Starting Method	Solids Passage mm	Dry Weight kg	Cable Length m
NK3-15	50	1.5	Single	Capacitor Start	8.5	29	10
NK4-22	50	2.2		Capacitor Start + Capacitor Run	8.5	29	10
NK3-22L	80	2.2		Capacitor Start + Capacitor Run	8.5	40	10

• Male threaded coupling for pipe connection available upon special request  
• Weights excluding cable

## Performance Curves

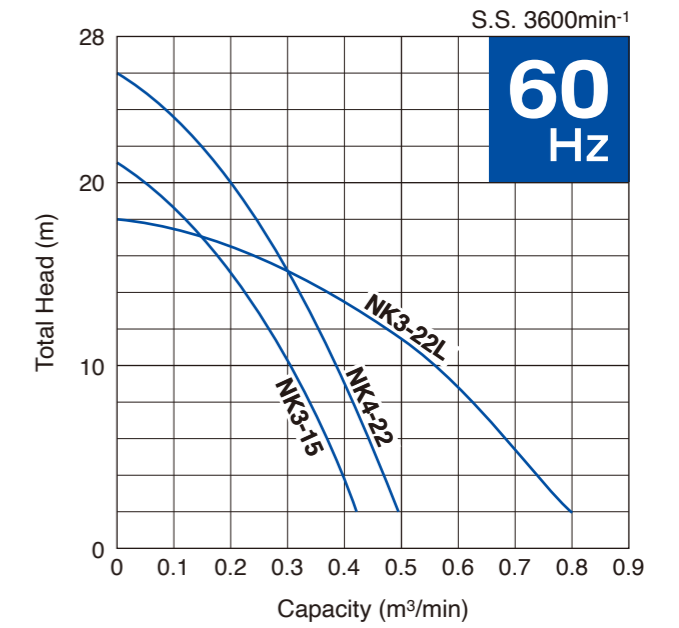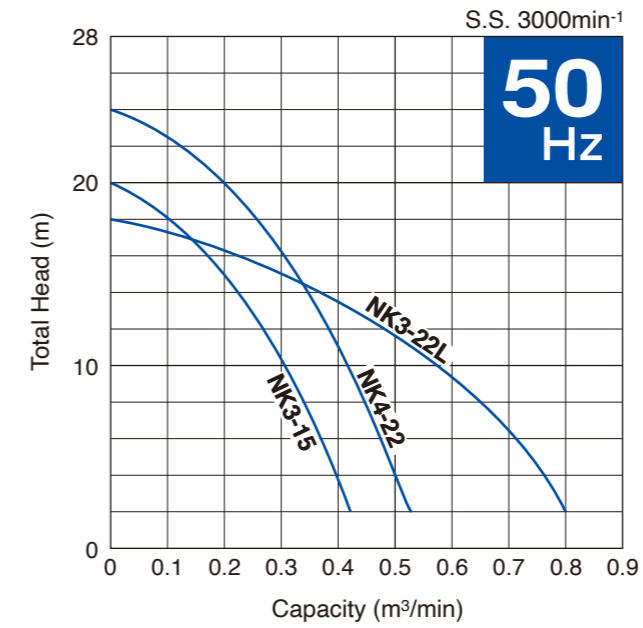

## Dimensions

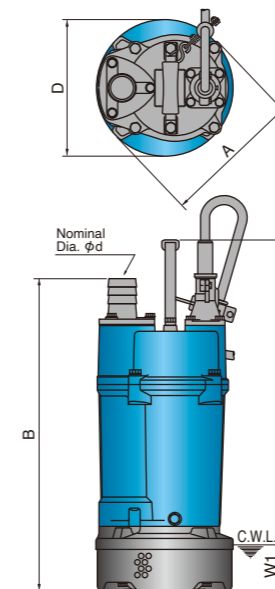

Unit: mm

Model	d	A	B	D	H	W1
NK3-15	50	243	546	240	614	80
NK4-22	50	243	546	240	614	80
NK3-22L	80	236	601	216	669	120

# LSC –Residue Drainage Pump–

The LSC-series is a submersible single-phase portable residue drainage pump. The specially designed bottom plate enables the pump to drain down to 1mm water level. It has a swing check valve that prevents reverse-flow of the sucked water when the pump stops its operation. The rubber stand protects the floor surface from scratching. The discharge direction is selectable between vertical and inclined, which prevents folding or bending of the discharge hose.



- Flow-thru Design
- Anti-wicking Cable Entry
- Motor Protector
- Dual Inside Mechanical Seal
- Oil Lifter
- V-ring
- Cable Clip
- Rubber Stand
- Reverse-flow Prevention Mechanism
- Multi-directional Hose Coupling

# LSP –Free-positioning Residue Drainage Pump–

The LSP pump is a single-phase portable self-priming residue drainage pump incorporating a submersible motor. The suction attachment, supplied as standard, makes the pump drain water down to floor level. The pump is equipped with a siphon breaker mechanism that prevents reverse-flow when the pump stops its operation. It is lightweight and easy to carry, as the major components are made of aluminum alloy and synthetic rubber. Since it incorporates a submersible motor, there is absolutely no problem even it is submerged in water.




- Flow-thru Design
- Anti-wicking Cable Entry
- Motor Protector
- Dual Inside Mechanical Seal
- Oil Lifter
- V-ring
- Rubber Stand
- Free-positioning Suction Attachment
- Reverse-flow Prevention Mechanism

Model	Discharge Bore mm	Motor Output kW	Phase	Starting Method	Dry Weight kg	Cable Length m
LSC1.4S	25	0.48	Single	Capacitor Run	12	5
LSC2.75S	50(25)*1	0.75		Capacitor Run	15.2	5

- \*1 25 mm discharge bore available upon special request
- Male threaded coupling for pipe connection available upon special request
- Weights excluding cable



## Dimensions

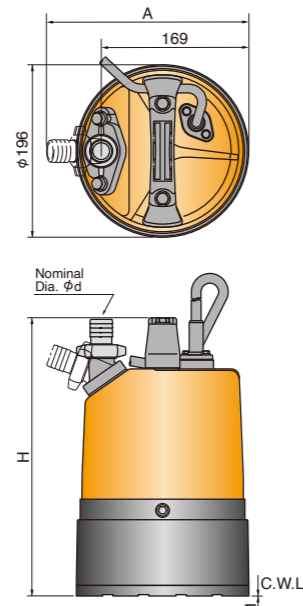

Unit: mm			
Model	d	A	H
LSC1.4S	25	231	316
LSC2.75S	50	236	371

## Performance Curves

\* The curve shows the pump performance while operating in a hanging condition without any restriction to the suction.

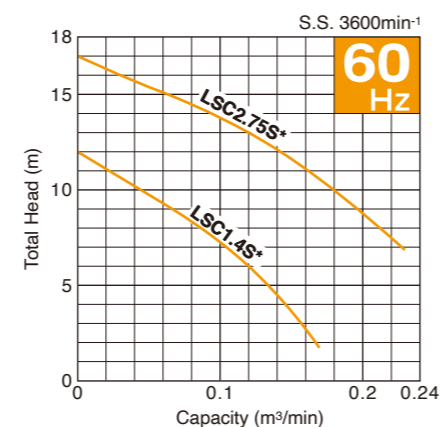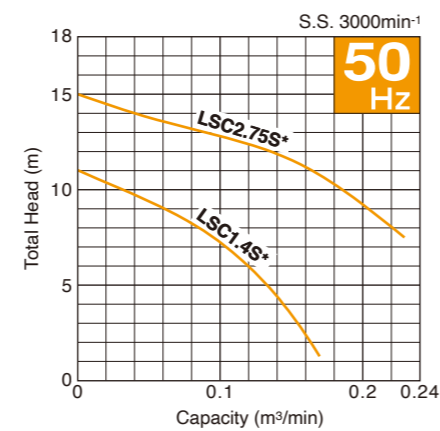


Model	Suction x Discharge Bore mm	Motor Output kW	Phase	Starting Method	Max. Head 50/60Hz m	Max. Capacity 50/60Hz L/min	Max. Vacuum kPa(mmHg)	Dry Weight kg	Cable Length m
LSP1.4S	25 x 25	0.48	Single	Capacitor Run	6.9 / 7.8	50 / 55	-73.3 (-550)	16.5	5

• Weights excluding cable

## Dimensions

Unit: mm

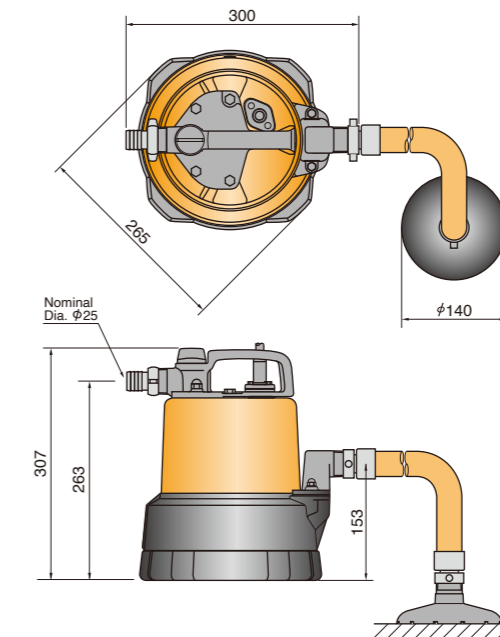



# FAMILY – Domestic Pumps –

The FAMILY/FAMILY-A series are submersible single-phase portable drainage pumps. In addition to the 25mm hose coupling, it also comes with an easy-to-attach 15mm hose coupling as a standard accessory. The FAMILY-A pump with a cylindrical float switch reduces power consumption and extends operating life. Moreover, it can be used as a residue pump and drain water to 1mm in depth by attaching the optional residue adapter to the pump casing (for FAMILY-12, standard model only).




- Flow-thru Design
- Anti-wicking Cable Entry
- Motor Protector
- Inside Mechanical Seal

- Option
- Residue Adapter for FAMILY-12
  - Seawater-Resistant Coating

Model	Discharge Bore mm	Motor Output kW	Phase	Starting Method	Dry Weight kg	Cable Length m
FAMILY-12	15, 25	0.1	Single	Capacitor Run	3.4	3
FAMILY-12A -Automatic-	15, 25	0.1		Capacitor Run	3.6	3

• Weights excluding cable

## Dimensions


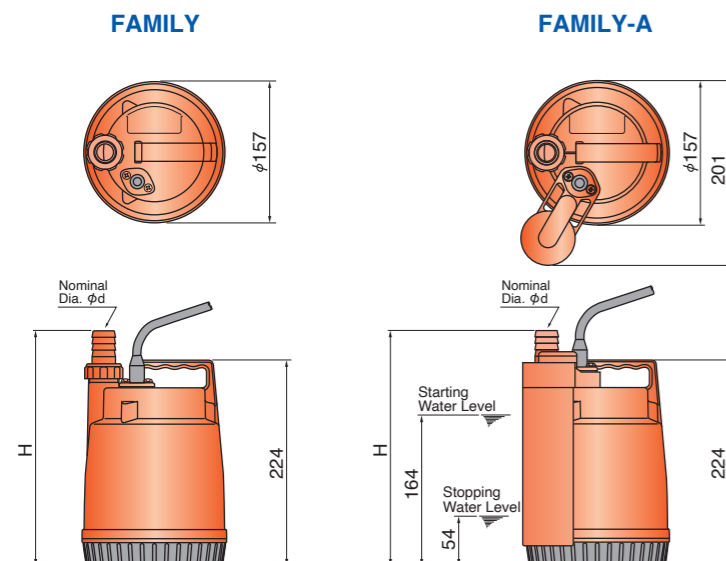


Unit: mm


d	H
15	250
25	256

## Performance Curves

Standard and Automatic models have the identical performance.

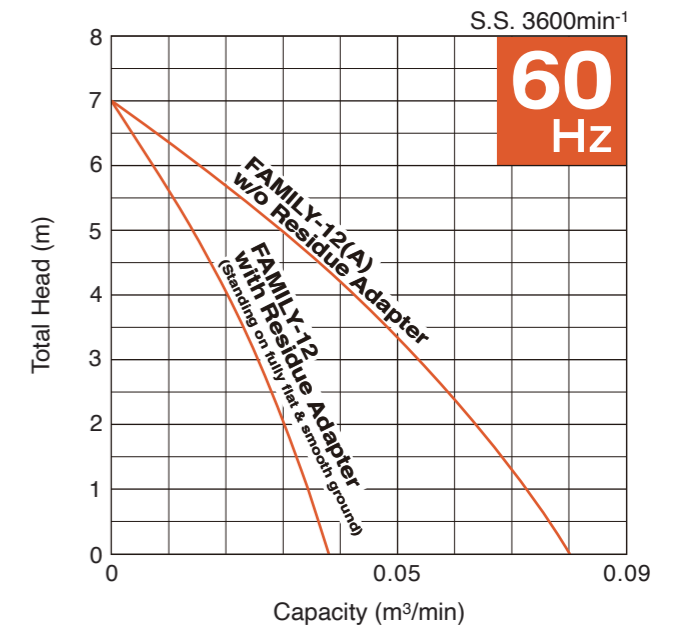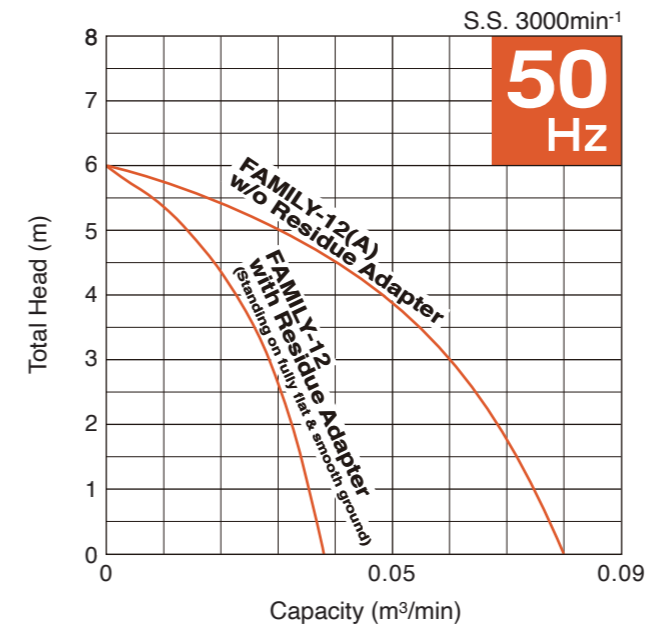

## Automatic Operation (FAMILY-A)

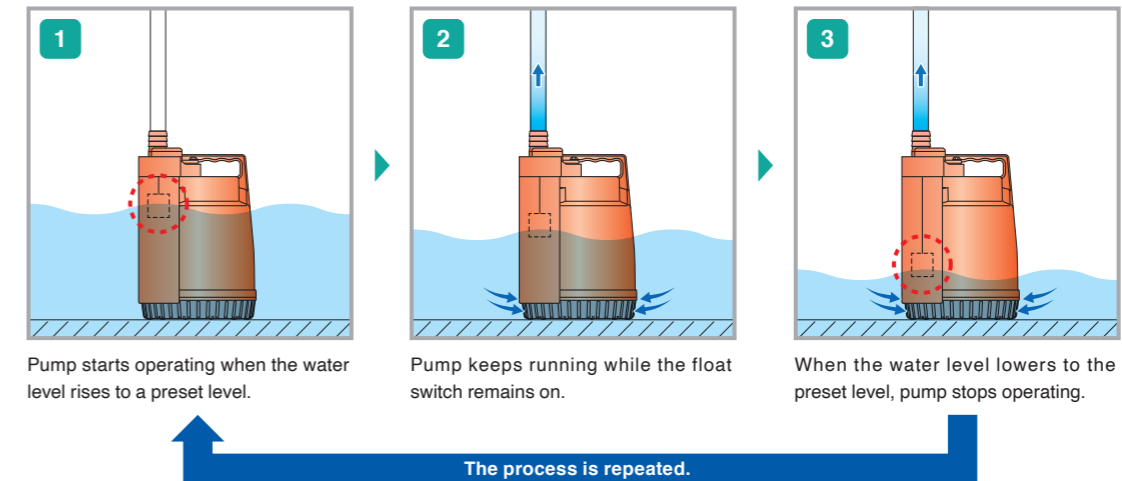


Optional Accessory

### Residue Adapter (for FAMILY-12, standard model only)

Attaching the optional residue adapter to the pump casing allows draining to 1mm in depth.

As standard specification, residual water by **12mm** can be drained.

With residue adapter, residual water by **1mm** can be drained.

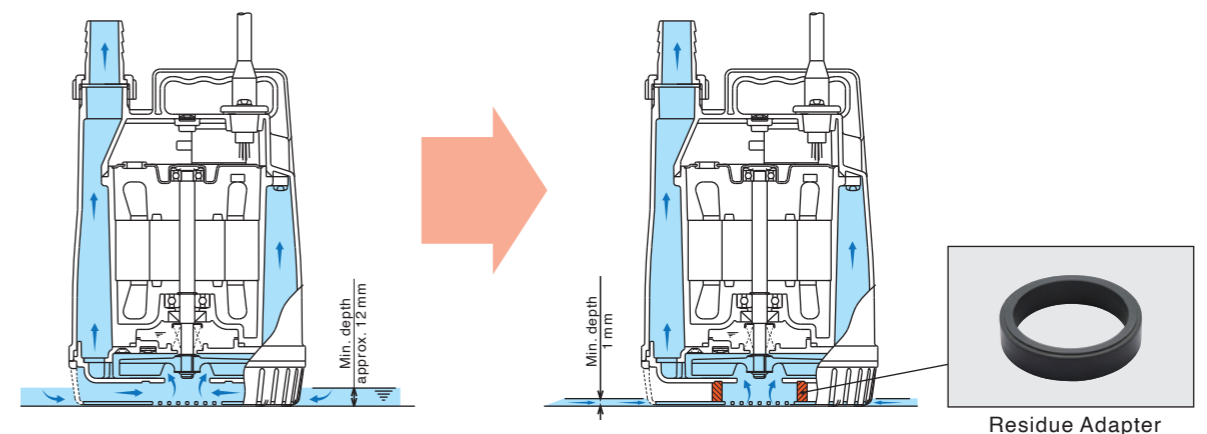

Residue Adapter

# Specifications

		LB			LB-A -Automatic-		HS		HSZ -Automatic-			HSD -Slurry-	HSR -Residue-	NK			LSC -Residue-		LSP -Residue-	FAMILY	FAMILY-A -Automatic-		
		LB-480	LB-800	LB-1500	LB-480A	LB-800A	HS2.4S	HS2.75S HS3.75S HS3.75SL	HSZ2.4S	HSZ2.75S HSZ3.75S HSZ3.75SL		HSD2.55S	HSR2.4S	NK3-15	NK4-22	NK3-22L	LSC1.4S	LSC2.75S	LSP1.4S	FAMILY-12	FAMILY-12A		
PUMP	Discharge Bore mm	50	50(80)		50	50(80)	50	50 80	50	50 80		50			80	25	50(25)	25	15, 25				
	Discharge Connection	Hose Coupling										Hose Coupling											
	Solids Passage mm	6					7					9	3	8.5			—						
	Impeller	Semi-vortex		Semi-open		Semi-vortex						Semi-vortex			Semi-open		Semi-vortex						
		Urethane Rubber		High-chromium Cast Iron		Urethane Rubber						High-chromium Cast Iron	Urethane Rubber		Ductile Cast Iron		High-chromium Cast Iron		Urethane Rubber		Glass-fiber Reinforced Resin		
	V-Ring / Oil Seal	Nitrile Butadiene Rubber					—	Nitrile Butadiene Rubber	—	Nitrile Butadiene Rubber		Nitrile Butadiene Rubber	—	Nitrile Butadiene Rubber					—				
	Casing	Synthetic Rubber					Gray Cast Iron	Ductile Cast Iron	Gray Cast Iron	Ductile Cast Iron		Ductile Cast Iron		Synthetic Rubber		Gray Cast Iron	Synthetic Rubber		Resin				
	Shaft Seal	Dual Inside Mechanical Seals (with Oil Lifter)										Dual Inside Mechanical Seals (with Oil Lifter)										Inside Mechanical Seal	
Silicon Carbide										Silicon Carbide													
Agitator	—					Sintered Alloy						High-chromium Cast Iron	—										
MOTOR	Type	Continuous-duty Rated, Dry-type Induction Motor										Continuous-duty Rated, Dry-type Induction Motor											
	Output kW	0.48	0.75	1.5	0.48	0.75	0.4	0.75	0.4	0.75		0.55	0.4	1.5	2.2		0.48	0.75	0.48	0.1			
	Phase	Single-phase										Single-phase											
	Pole	2										2											
	Insulation	E		B		E						E		F		B		E					
	Starting Method	Capacitor Run		Capacitor Start		Capacitor Run						Capacitor Run		Capacitor Start	Capacitor Start + Capacitor Run		Capacitor Run						
	Motor Protector (built-in)	MTP	CTP		MTP	CTP	MTP	CTP	MTP	CTP		CTP	MTP	CTP			MTP	CTP	MTP				
	Lubricant	155		350		155		160				160		270			155		150	30			
		Turbine Oil (ISO VG32)										Turbine Oil (ISO VG32)										Liquid Paraffin (ISO VG15)	
	Shaft	403 Stainless Steel											403 Stainless Steel			420 Stainless Steel	403 Stainless Steel		420 Stainless Steel				
Power Cable	5		10		5						5		10			5		3					
	PVC		Chloroprene Rubber		PVC						PVC		Chloroprene Rubber			PVC							
Automatic Control Device	—				Electrodes		—		Float Switch			—										Cylindrical Float Switch	
Dry Weight* kg	10.4	13.1	33	11	13.7	11.3	16.4 16.8 19.6	11.3	16.4 16.8 19.6		14	10.8	29		40	12	15.2	16.5	3.4	3.6			

\* Weights excluding cable



We reserve the right to change the specifications and designs without prior notice. The OO series and model OO are indicated with our series/model codes in this catalog.

**TSURUMI  
MANUFACTURING CO., LTD.**

[www.tsurumi-global.com](http://www.tsurumi-global.com)



Web



SNS

Your Dealer